



*Cofe*

PTO/SB/21 (09-06)

Approved for use through 03/31/2007. OMB 0651-0031

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>TRANSMITTAL FORM</b>  (to be used for all correspondence after initial filing)	Application Number	10/776,325
	Filing Date	Feb. 11, 2004
	First Named Inventor	John R. Williams
	Art Unit	
	Examiner Name	
Total Number of Pages in This Submission	Attorney Docket Number	19857.2

ENCLOSURES (Check all that apply)		
<input type="checkbox"/> Fee Transmittal Form	<input type="checkbox"/> Drawing(s)	<input type="checkbox"/> After Allowance Communication to TC
<input type="checkbox"/> Fee Attached	<input type="checkbox"/> Licensing-related Papers	<input type="checkbox"/> Appeal Communication to Board of Appeals and Interferences
<input type="checkbox"/> Amendment/Reply	<input checked="" type="checkbox"/> Petition	<input type="checkbox"/> Appeal Communication to TC (Appeal Notice, Brief, Reply Brief)
<input type="checkbox"/> After Final	<input type="checkbox"/> Petition to Convert to a Provisional Application	<input type="checkbox"/> Proprietary Information
<input type="checkbox"/> Affidavits/declaration(s)	<input type="checkbox"/> Power of Attorney, Revocation	<input type="checkbox"/> Status Letter
<input type="checkbox"/> Extension of Time Request	<input type="checkbox"/> Change of Correspondence Address	<input checked="" type="checkbox"/> Other Enclosure(s) (please identify below):
<input type="checkbox"/> Express Abandonment Request	<input type="checkbox"/> Terminal Disclaimer	1. Request for Certificate of Correction
<input type="checkbox"/> Information Disclosure Statement	<input type="checkbox"/> Request for Refund	2. Certificate of Correction
<input type="checkbox"/> Certified Copy of Priority Document(s)	<input type="checkbox"/> CD, Number of CD(s) _____	3. Check for \$100
<input type="checkbox"/> Reply to Missing Parts/Incomplete Application	<input type="checkbox"/> Landscape Table on CD	4. Claim Listing
<input type="checkbox"/> Reply to Missing Parts under 37 CFR 1.52 or 1.53	Remarks	5. Copy of patent 7,174,956
<b>Certificate</b> <b>APR 17 2007</b> <b>of Correction</b>		
SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT		
Firm Name	Matthew Burr C/O Moster & Wynne, PC	
Signature	<i>Matthew Burr</i>	
Printed name	Matthew Burr	
Date	4-11-2007	Reg. No. 37,591

CERTIFICATE OF TRANSMISSION/MAILING		
I hereby certify that this correspondence is being facsimile transmitted to the USPTO or deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450 on the date shown below:		
Signature	<i>Brao Hendrickson</i>	
Typed or printed name	Brao Hendrickson	Date 4-11-07

This collection of information is required by 37 CFR 1.5. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to 2 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

**APR 17 2007**

## UNITED STATES PATENT AND TRADEMARK OFFICE CERTIFICATE OF CORRECTION

Page 1 of 1

PATENT NO. : 7,174,956

APPLICATION NO.: 10/776,325

ISSUE DATE : Feb. 13, 2007

INVENTOR(S) : John R. Williams et al.

It is certified that an error appears or errors appear in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

At Col. 8, line 18: replace -- adopter -- with "adapter"

At Col. 8, line 24: replace -- corn -- with "cam"

At Col. 8, line 27: replace -- corn -- with "cam"

### MAILING ADDRESS OF SENDER (Please do not use customer number below):

Matthew Burr c/o Moster Wynne, PC  
620 Congress, Ste 320, Austin, TX 78701 USA

This collection of information is required by 37 CFR 1.322, 1.323, and 1.324. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 1.0 hour to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Attention Certificate of Corrections Branch, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

APR 17 2007



REQUEST FOR CERTIFICATE OF CORRECTION  
UNDER 37 CFR 1.322

ATTN: Certificate of Correction Branch

Commissioner for Patents

P.O. Box 1450

Alexandria, VA 22313-1450

---

First Named Inventor: John R. Williams Patent No.: 7,174,956  
Application No.: 10/776,325 Issue Date: Feb. 13, 2007  
Title: Stripper Rubber Adapter

---

Statement

The captioned patent application contains the typographical errors indicated on the enclosed Certificate of Correction. The patentee respectfully believes that the errors are from the Patent Office, probably as a consequence of scanning which created artifacts that resulted in misspelled words. In support of the patentee's belief, the patentee submits herewith a copy of the claim listing submitted to the Office during prosecution, which claim listing shows that errors were not present during prosecution. Also enclosed for the convenient reference of the Office is a copy of the issued patent in question.

---

REQUEST FOR CERTIFICATE OF CORRECTION  
UNDER 37 CFR 1.322

First Named Inventor: John R. Williams Patent No.: 7,174,956  
Application No.: 10/776,325 Issue Date: Feb. 13, 2007  
Title: Stripper Rubber Adapter

APR 17 2007

04/13/2007 SSESHE1 00000092 7174956 100.00 DP  
01 FC:1811

The errors are of a nature amenable to correction by a Certificate of Correction because the errors are:

- (1) of a clerical nature,
- (2) of a typographical nature, or
- (3) a mistake of minor character.

Additionally, the requested correction does not involve any changes which would:

- (1) constitute new matter or
- (2) require reexamination.

One error consists of a typographical mistake in which the word "adapter" was printed as "adopter" by replacement of the letter "a" by the letter "o". It is clear from the context that the error is typographical in nature and that appropriate correction would not constitute new matter or require re-examination.

The two other errors result from a typographical mistake in which the letter combination "am" in the word "cam" became printed as "or" so that the intended word "cam" became "corn". It is clear from the context that "corn" has no meaning and that the intended word was "cam"

---

REQUEST FOR CERTIFICATE OF CORRECTION  
UNDER 37 CFR 1.322

First Named Inventor: John R. Williams  
Application No.: 10/776,325  
Title: Stripper Rubber Adapter

Patent No.: 7,174,956  
Issue Date: Feb. 13, 2007

JER 17 2007

The correct fee for a small entity under MPEP § 1.20 of \$100.00 is submitted herewith.

Accordingly, the applicant respectfully prays that the request be granted and that the Certificate of Correction issue.

Respectfully submitted,

By: 

MATTHEW E. BURR  
Registration No.: 37,591  
Customer No.: 479000  
MOSTER WYNNE  
620 Congress, Ste 320  
Austin, TX 78701  
(512) 320-0601  
mburr@mosterwynne.com

---

REQUEST FOR CERTIFICATE OF CORRECTION  
UNDER 37 CFR 1.322

First Named Inventor: John R. Williams  
Application No.: 10/776,325  
Title: Stripper Rubber Adapter

Patent No.: 7,174,956  
Issue Date: Feb. 13, 2007

17 2007



## CLAIM LISTING

Claims 1-21 are canceled.

22. [NEW] A connector for selectively connecting a stripper rubber to drilling head equipment of a well, the connector comprising:

a generally cylindrical adapter connectable to the equipment, wherein the adapter defines a primary bore to accommodate a down hole tubular, the adapter further comprising:

(i) one or more cam pin bores substantially parallel to the primary bore;

(ii) one or more cam lock bores at least partially perpendicular to the one or more cam pin bores, wherein the cam lock bores are positioned such that the cam pin bores and cam lock bores partially intersect to form an aperture; and

(iii) an inner surface comprising a plurality of threaded bores substantially parallel to the primary bore.

23. [NEW] The connector of claim 22, further comprising an o-ring groove along the outer diameter of the inner surface.

APR 17 2007

24. [NEW] A connector system for connecting a stripper rubber to drilling head equipment of a well, the connector system comprising:

(a) a generally cylindrical adapter connectable to the equipment, wherein the adapter defines a primary bore to accommodate a down hole tubular, the adapter further comprising:

(i) one or more cam pin bores substantially parallel to the primary bore and adapted to house one or more cam pins;

(ii) one or more cam lock bores adapted to house one or more at least partially rotatable cam locks, wherein the cam lock bores are positioned such that the cam pin bores and cam lock bores partially intersect to form an aperture through which the cam locks engage the cam pins; and

(iii) an inner surface comprising a plurality of threaded bores substantially parallel to the primary;

(b) one or more at least partially rotatable cam locks disposable within one or more of the cam lock bores; and

17 2007

(c) one or more cam pins disposable within one or more of the cam pin bores.

25. [NEW] The connector system of claim 24, wherein the adapter further comprises an o-ring groove along the out diameter of the inner surface.
26. [NEW] The connector system of claim 24, further comprising one or more springs disposable in one or more of the cam lock bores to provide a spring-biased force on one or more of the cam locks.
27. [NEW] The connector system of claim 24, wherein one or more of the cam pins comprise a threaded end.

17 2007





US007174956B2

(12) **United States Patent**  
**Williams et al.**

(10) **Patent No.:** **US 7,174,956 B2**  
(45) **Date of Patent:** **Feb. 13, 2007**

(54) **STRIPPER RUBBER ADAPTER**

4,949,796 A \* 8/1990 Williams ..... 175/209

(76) Inventors: **John R. Williams**, 4800 Williams Dr.  
#212-404, Georgetown, TX (US) 78628;  
**Charles T. Bishop**, 4085 McRay Ave.,  
Springdale, AR (US) 72782

\* cited by examiner

*Primary Examiner*—Willilam Neuder

(74) *Attorney, Agent, or Firm*—Matthew E. Burr

(\*) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 312 days.

(57) **ABSTRACT**

(21) Appl. No.: **10/776,325**

(22) Filed: **Feb. 11, 2004**

(65) **Prior Publication Data**

US 2005/0173127 A1 Aug. 11, 2005

(51) **Int. Cl.**  
**E21B 33/068** (2006.01)

(52) **U.S. Cl.** ..... **166/85.3; 175/209; 175/214**

(58) **Field of Classification Search** ..... **411/351;**  
**403/355, 356, 231; 166/85.3; 175/209,**  
**175/214**


See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

1,980,336 A \* 11/1934 Hoagland ..... 82/147

**6 Claims, 4 Drawing Sheets**

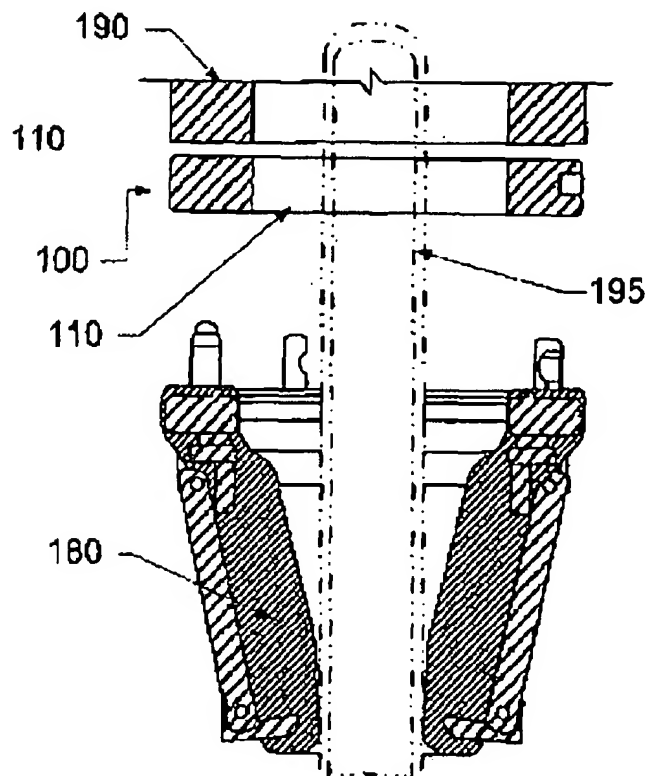

APR 17 2007

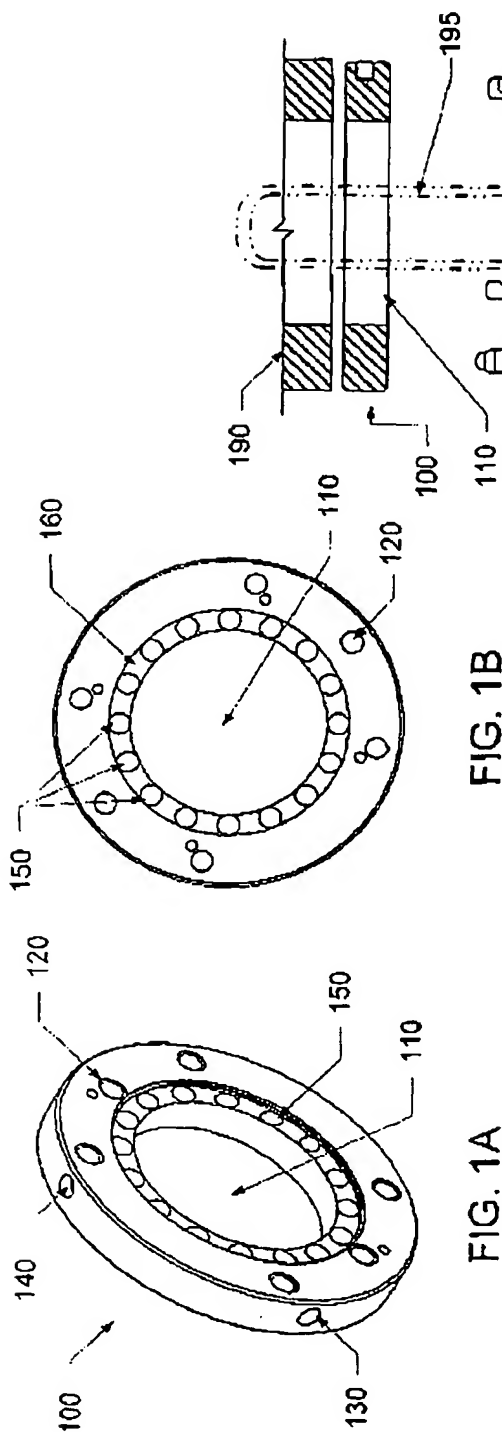


FIG. 1B

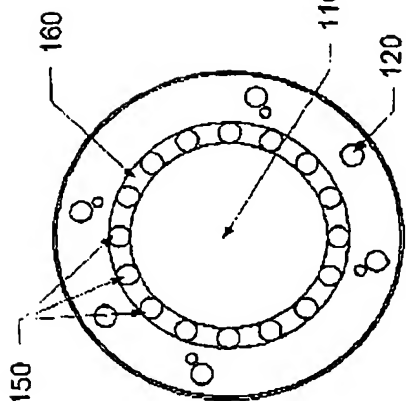


FIG. 1C

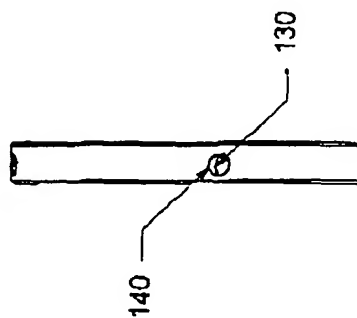


FIG. 1D


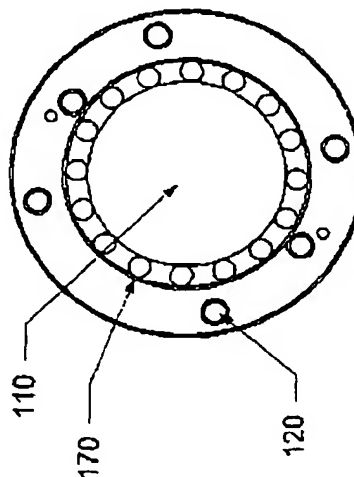


FIG. 1E

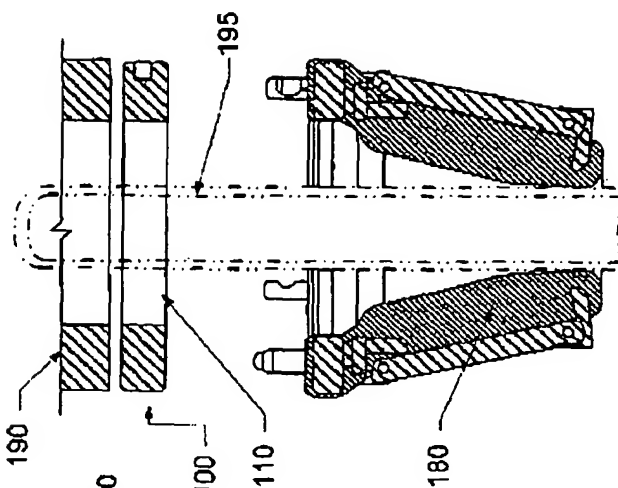

APR 17 2007



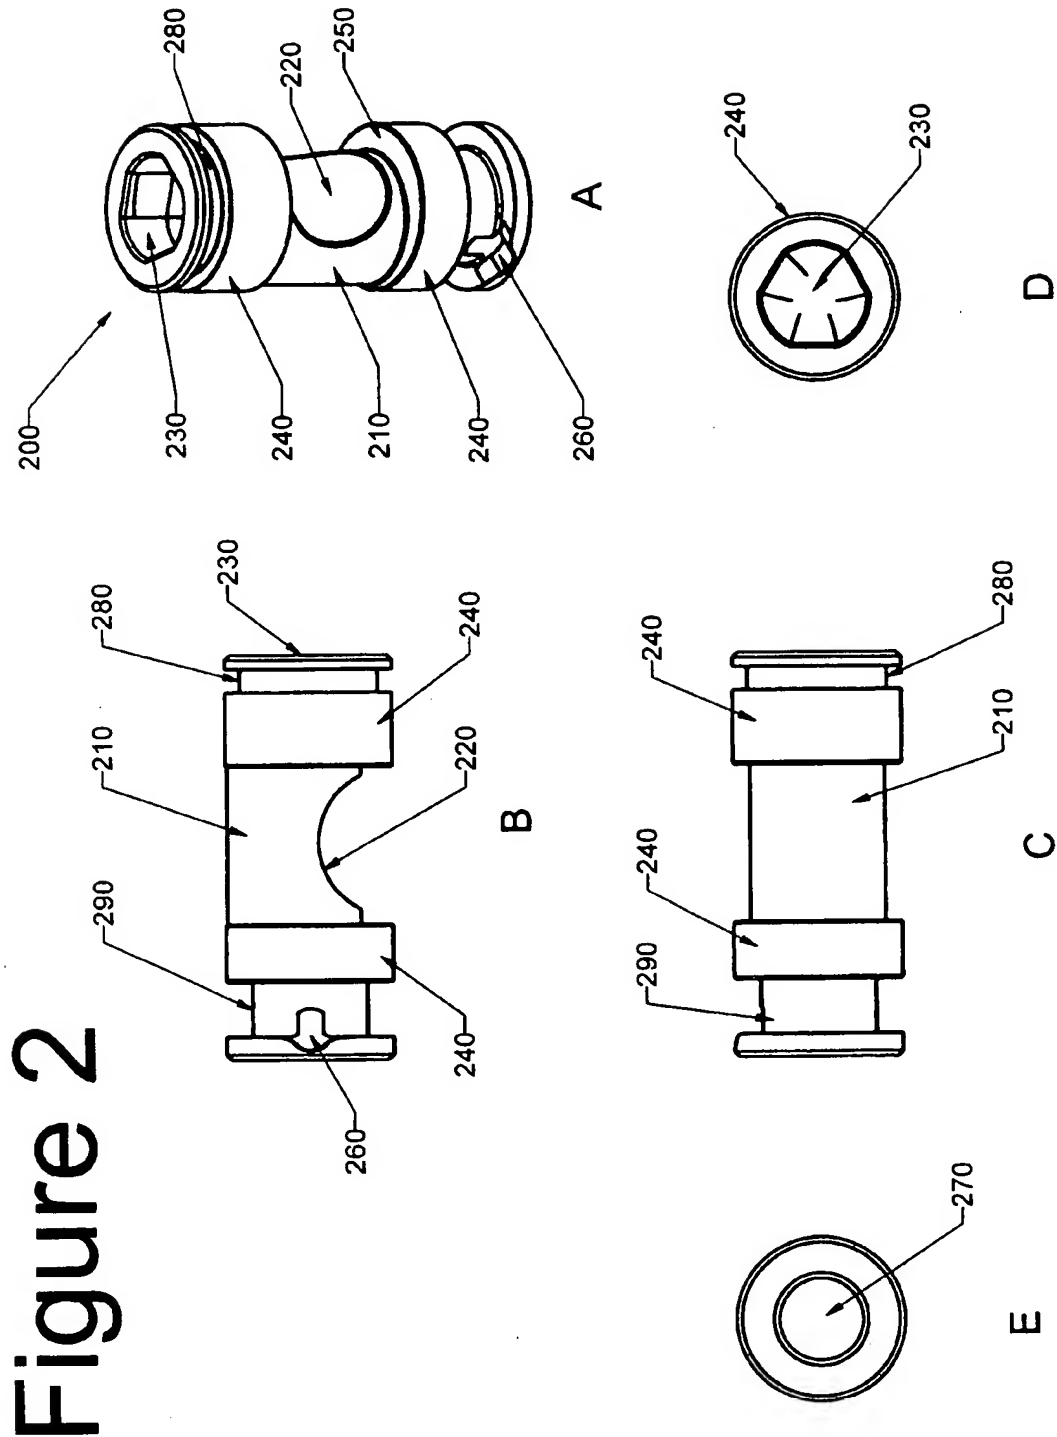


Figure 3

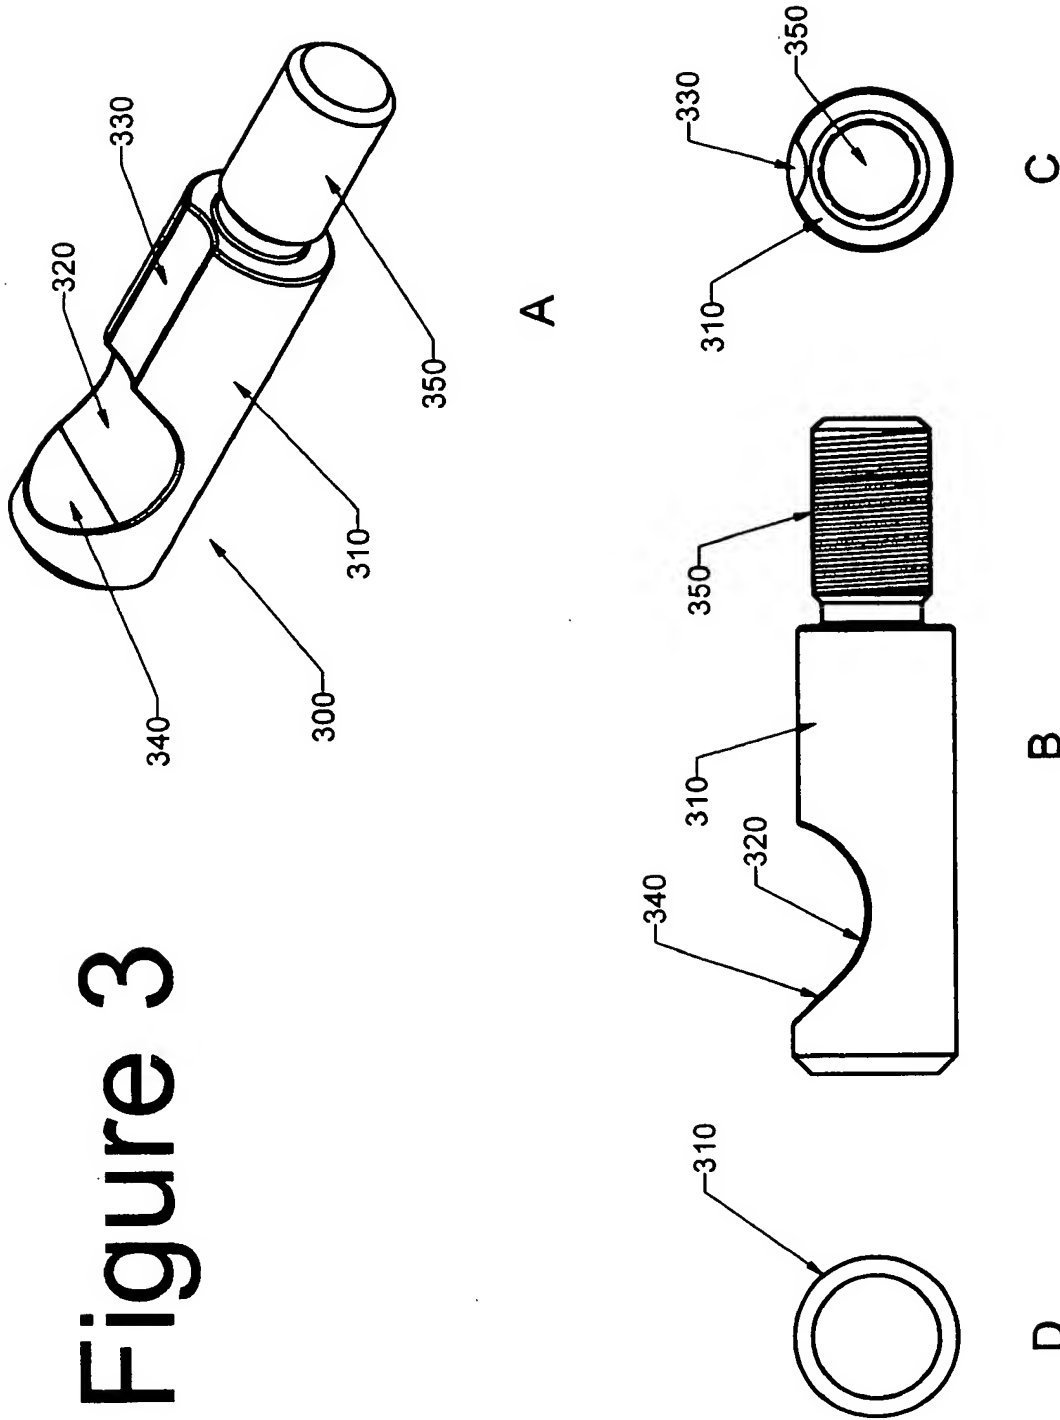

FEB 17 2007

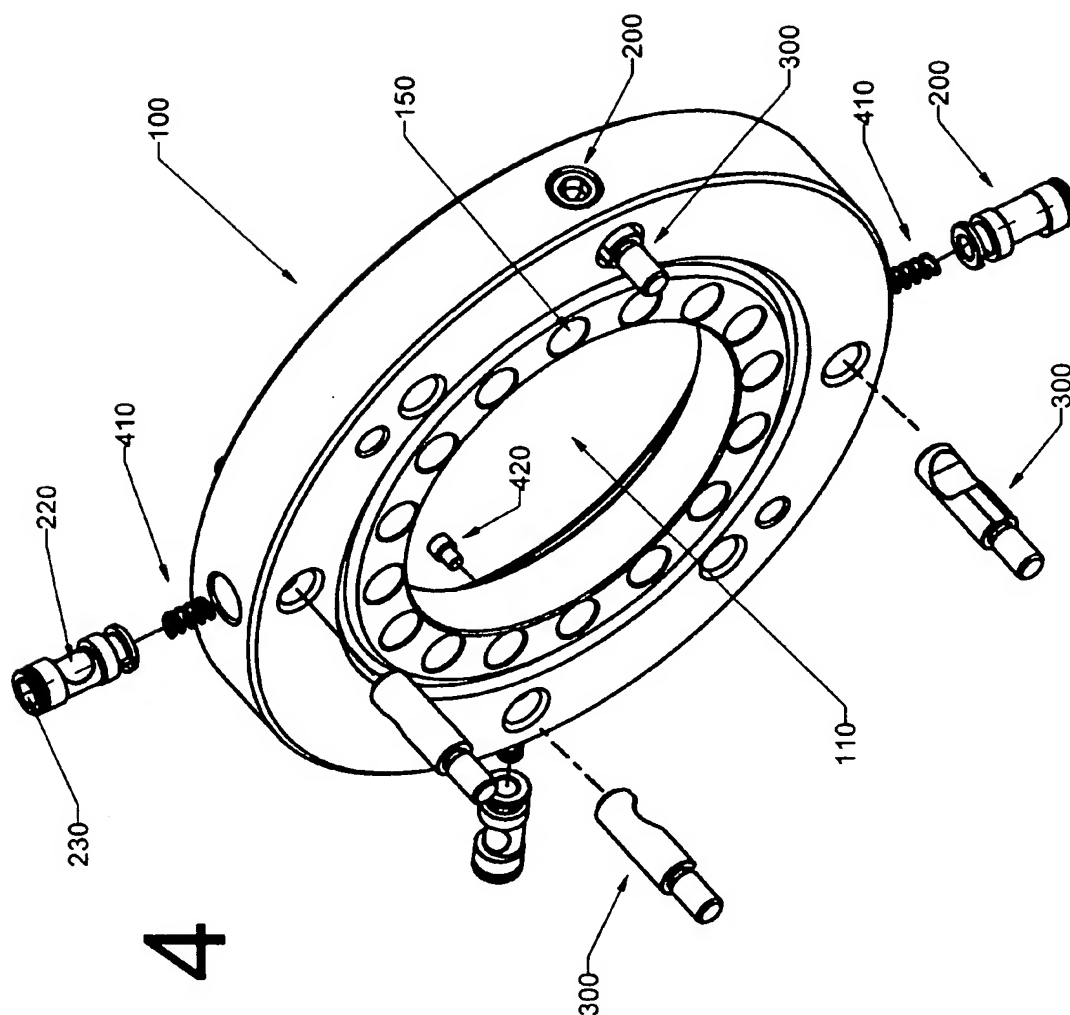

# Figure 4

APR 17 2007

1

**STRIPPER RUBBER ADAPTER****FIELD OF THE INVENTION**

The present invention relates to drilling heads and rotating blowout preventers or diverter/preventers for oil and gas wells and more particularly, to apparatus, systems and methods for connecting or disconnecting a stripper rubber to or from equipment of a drilling head, such as the bearing assembly, to pressure-seal the interior of the well bore for the circulation, containment or diversion of drilling fluid through the well during drilling operations.

**BACKGROUND OF THE INVENTION**

Oil, gas, water and geothermal wells are typically drilled with a drill bit connected to a hollow drill string which is inserted into a well casing cemented in the well bore. A drilling head is attached to the well casing, wellhead or to associated blowout preventer equipment, for the purposes of sealing the interior of the well bore from the surface and facilitating forced circulation of drilling fluid through the well while drilling or diverting drilling fluids away from the well. Drilling fluids include, but are not limited to, water, steam, drilling muds, air, and other gases.

In the forward circulation drilling technique, drilling fluid is pumped downwardly through the bore of the hollow drill string, out the bottom of the hollow drill string and then upwardly through the annulus defined by the drill string and the interior of the well casing, or well bore, and subsequently, and out through a side outlet above the well head. In reverse circulation, a pump impels drilling fluid through a port, down the annulus between the drill string and the well casing, or well bore, and then upwardly through the bore of the hollow drill string and out of the well.

Drilling heads typically include a stationary body, often referred to as a bowl, which carries a rotatable spindle such as a bearing assembly, rotated by a kelly apparatus or top drive unit. One or more seals or packing elements, sometimes referred to as stripper packers or stripper rubbers, is carried by a spindle to seal the periphery of the kelly or the drive tube or sections of the drill pipe, whichever may be passing through the spindle and the stripper rubber, and thus confine or divert the pore pressure in the well to prevent the drilling fluid from escaping between the rotating spindle and the drilling string.

As modern wells are drilled to ever deeper depths, greater temperature and pressures are encountered at the drilling head. These rigorous drilling conditions pose increased risks to rig personnel from accidental scalding, burns or contamination by steam, hot water and hot, caustic well fluids.

Rotating blowout preventers and diverters are well known to those of ordinary skill in the art of well pressure control. Rotation of the diverter/preventer is facilitated by a sealing engaged bearing assembly through which the drill string rotates relative to a stationary bowl or housing in which the bearing assembly is seated. Pressure control is achieved by means of one or more stripper rubbers connected to the bearing assembly and disposed around the drill string. At least one stripper rubber rotates with the drill string. Stripper rubbers typically taper downward and include rubber or other resilient material so that the down hole pressure pushes up on the rubber, pressing the rubber against the drill string to achieve a fluid-tight seal. Stripper rubbers often further include metal inserts that provide support for bolts or other attachment means and which also provide a support struc-

2

ture to minimize deformation of the rubber cause by down hole pressure acting on the rubber.

Stripper rubbers are connected or adapted to equipment of the drilling head to establish and maintain the pressure control seal around a down hole tubular. It will be understood by those skilled in the art that a variety of means are used to attach a stripper rubber to the equipment above it. Such attachment means include bolting from the top, bolting from the bottom, screwing the stripper rubber directly onto the equipment via cooperating threaded portions on the top of the stripper rubber and the bottom of the equipment, and clamps. It will also be understood that, depending on the particular equipment being used at a drilling head, a stripper rubber at one well may be connected to equipment specific to that well while at another well a stripper rubber is connected to different equipment. For example, at one well the stripper rubber may be connected to the bearing assembly while at another well the stripper rubber may be connected to an inner barrel or an accessory of the drilling head. While the present invention is described here in relation to connecting the stripper rubber to the bearing assembly, it will be evident that the invention contemplates connection of the stripper rubber to any desired equipment of the drilling head.

Typically, a rubber o-ring seal, or similar seal, is disposed between the stripper rubber and the bearing assembly to improve the connection between the stripper rubber and the bearing assembly. It is common practice to tighten the bolts or screws of the connection with heavy wrenches and sledge hammers. The practice of using heavy tools to tighten a bolt, for example, can result in over-tightening, to the point where the threads or the bolt head become stripped. The results of over-tightening include stripped heads, where the bolt or screw cannot be removed, or stripped threads, where the bolt or screw has no grip and the connection fails. Both results are undesirable.

Drilling head assemblies periodically need to be disassembled to replaced stripper rubbers or other parts, lubricate moving elements and perform other recommended maintenance. In some circumstances, stripped or over tightened bolts or screws make it very difficult if not impossible to disengage the stripper rubber from the drilling head assembly to perform recommended maintenance or parts replacement.

There is a danger of serious injury to rig workers when heavy tools are used to make a stripper rubber connection at the drilling head. The connection should be made quickly and achieve a fluid tight seal.

It is desirable, therefore, to obtain a connector for optionally connecting a stripper rubber assembly to a bearing assembly, or other equipment, of a drilling head that is effective, safe, simple, fast and elegant.

**BRIEF DESCRIPTION OF THE DRAWINGS**

The present invention is further described in the detailed description that follows, by reference to the noted drawings by way of non-limiting examples of embodiments of the present invention, in which like reference numerals represent similar parts throughout several views of the drawings, and in which:

FIG. 1A is a perspective view schematic drawing of an adapter of one embodiment of the present invention.

FIG. 1B is top view schematic drawing of the adapter of FIG. 1A.

FIG. 1C is a side view schematic drawing of the adapter of FIG. 1A.

3

FIG. 1D is a bottom view schematic drawing of the adapter of FIG. 1A.

FIG. 1E is an exploded side view cross-section of a stripper rubber connection to drilling head equipment with an adapter of FIG. 1A.

FIG. 2A is a perspective view schematic drawing of a cam lock of one embodiment of the present invention.

FIG. 2B is a horizontal side view schematic drawing of the cam lock of FIG. 2A.

FIG. 2C is a horizontal top view schematic drawing of the cam lock of FIG. 2A.

FIG. 2D is an axial top view schematic drawing of the cam lock of FIG. 2A.

FIG. 2E is an axial bottom view schematic drawing of the cam lock of FIG. 2A.

FIG. 3A is a perspective view schematic drawing of a cam pin of one embodiment of the present invention.

FIG. 3B is a horizontal side view schematic drawing of the cam pin of FIG. 3A.

FIG. 3C is an axial bottom view schematic drawing of the cam pin of FIG. 3A.

FIG. 3D is an axial top view schematic drawing of the cam pin of FIG. 3A.

FIG. 4 is an exploded perspective view schematic drawing of one embodiment of an adapter of the present invention.

#### DETAILED DESCRIPTION OF THE INVENTION

In view of the foregoing, the present invention, through one or more of its various aspects, embodiments and/or specific features or sub-components, is thus intended to bring out one or more of the advantages that will be evident from the description. The present invention is described with frequent reference to stripper rubber adapters. It is understood that a stripper rubber adapter is merely an example of a specific embodiment of the present invention, which is directed generically to connectors and systems and methods for making connections within the scope of the invention. The terminology, therefore, is not intended to limit the scope of the invention.

Oil and gas wells are drilled with a drill bit attached to a hollow drill string which passes down through a well casing installed in the well bore. A drilling head attached to the top of the well casing, where it emerges from the ground to seal the interior of the well casing from the surface, permits the forced circulation or diversion of drilling fluid or gas during drilling operations. In the forward circulation drilling mode, the drilling fluid or gas is pumped down through the interior of the hollow drill string, out the bottom thereof, and upward through the annulus between the exterior of the drill string and the interior of the well casing. In reverse circulation, the drilling fluid or gas is pumped down the annulus between the drill string and the well casing and then upward through the hollow drill string.

Drilling heads often include a stationary body that carries a rotatable spindle such as a bearing assembly that is rotated by a kelly or top drive unit that drives the rotary drilling operation. A seal or packing, often referred to as a stripper rubber or packer, is carried by the spindle to seal the periphery of the kelly or the sections of drill pipe, whichever is passing through the spindle, and thereby confine the fluid pressure in the well casing and prevent the drilling fluid, whether liquid or gas, from escaping between the rotary spindle and the drill string.

4

Stripper packers provide rotational and slideable sealing of the drill string within the drilling head. The rotation of the kelly and drill string, the frequent upward and downward movement of the kelly and drill string during addition of drill pipe sections, and the high pressures to which the drilling head is subjected, demand that the consumable packing components of the drilling head be able to be quickly and securely replaced. As modern oil and gas wells go to greater depths having greater down hole bore pressures, ever more reliable means of sealing the drill string against release of internal drilling fluid pressure are sought.

The attachment of the stripper packer to the inner barrel of the wellhead is important in the containment or diversion of drilling fluid under bore hole pressure. Typically, the stripper packer includes an elongated generally cylindrical hard-rubber packer having an annular mounting collar secured to its upper end. The mounting collar of the packer, in turn, is secured onto the lower end of the spindle by any one of a variety of means, including bolting from the top, bolting from the bottom, screwing on with cooperating threaded portions or with a mounting clamp that is screwed or bolted tight for a positive mechanical interlock between the spindle mounting flange and the stripper rubber collar.

Some packers incur tearing of the stripper rubber or breaking of the fluid seal with the mounting clamp due to localized stress concentrations at the rubber to clamp interface. Increased cost of manufacture has resulted from the complexities of the molding process and the complex design of the mounting clamp.

The art has not produced many viable alternatives to the above-described structures due, in part, to the difficulty of forming a suitable releasable yet reliable connection between a drilling head and a stripper rubber. This has been particularly true in those cases where the frictional engagement between the stripper rubber and the drill string provides the rotary driving force for the rotary spindle in the drilling head. In such instances, the stripper rubber is under constant torque loading and this tends to accelerate wear and ultimate failure of the rubber-to-spindle seal.

The present invention provides a stripper rubber adapter that eliminates bolts, screws and clamps, and which is selectively detachable from the drilling head. When assembled, the stripper rubber adapter of the present invention optionally bolts to the bottom of the spindle of the drill head by the selectively lockable engagement of one or more cam locks and cam pins which maintain the stripper rubber in compressive engagement with the barrel to provide a fluid-tight and pressure-tight seal therebetween and to support rotary torque loads transmitted via the stripper rubber from the rotating drill string to the rotary spindle.

Turning now to the drawings, FIG. 1A is a perspective view schematic drawing of an adapter 100 of one embodiment of the present invention. The generally cylindrical shape of adapter 100 defines primary bore 110, through which a down hole tubular, such as a drill string, may be extended. More than one cam pin bores 120 extend through the width of adapter 100 and are spaced around adapter 100. Bore 120 accommodate cam pins such as depicted in FIGS. 3A-D.

More than one cam lock bores 130, spaced around the side of adapter 100, are slightly offset from bores 120 so that bores 120 and 130 intersect forming apertures 140. Bore 130 accommodate cam locks such as depicted in FIGS. 2A-E. Cam locks 200 matingly engage cam pins 300 through apertures 140.

FIG. 1B is top view schematic drawing of adapter 100. Primary bore 110 and cam pin bores 120 are shown looking

5

down on the top of adapter 100. Threaded bores 150 disposed around annular inner surface 160 of adapter 100 provide means for screwing of bolting adapter 100 to the spindle of the drilling head.

FIG. 1C is a side view schematic drawing of adapter 100. Looking through cam lock bore 130, aperture 140 can be seen.

FIG. 1D is a bottom view schematic drawing of adapter 100. Groove 170 is formed to receive a sealing element, such as a gasket or an o-ring. One embodiment of the invention provides a stripper rubber having a mating annular ridge around the top of the stripper rubber such that the ridge fits into groove 170. An alternative embodiment provides the ridge coated in rubber or some other elastic or sealing material, such that when the ridge is pressed into groove 170, the sealing material around the ridge is compressed to enhance the effectiveness of the seal.

FIG. 1E is an exploded side view cross-section of a stripper rubber connection to drilling head equipment with an adapter of FIG. 1A. Adapter 100 connects to stripper rubber 180 as described herein below and connects to equipment 190 also as described herein below. Down hole tubular 195 extends through equipment 190, adapter 100 through bore 110 and stripper rubber 180.

FIG. 2A is a perspective view schematic drawing of a cam lock 200 of one embodiment of the present invention. Cam lock body 210 has concave portion 220. The curvature of concave portion 220 is substantially equal to or less than the curvature of cam pin bore 120 (FIGS. 1A-C) and is also less than or equal to the curvature of cam pin body 310 of cam pin 300 such as depicted in FIGS. 3A-D. Cam lock head 230 is shaped to accommodate a wrench suitable for turning cam lock 200. Cam lock shoulder 240 is axially disposed on both sides of concave portion 220 and has a larger outer diameter than cam lock body 210. The outer diameter of shoulder 240, however, is small enough to fit within any of cam lock bores 130. The surfaces of cam lock shoulders 240 are, preferably, polished to facilitate full, or at least partial reciprocal rotation of cam lock 200 within bore 130 of adapter 100.

Cam lock body 210 is shaped to provide a bias which is depicted in FIG. 2A at surface 250 of shoulder 240. The bias is obtained by forming cam lock body 210 with a slightly ovoid circumference. The biased shape of cam lock body 210 operates on cam pin 300 so to pull cam pin 300 into a tight interference fit when the cam lock and cam pin are in a locked position relative to each other.

FIG. 2B is a horizontal side view schematic drawing of the cam lock of FIG. 2A. In the particular embodiment of the present invention depicted in this figure, the end of cam lock 200 distal from cam lock head 230 provides recess 260 that engages a spring-loaded stop when cam lock 200 is rotated to an unlocked position. The spring loaded stop provides an audible "snap" when it engages recess 260.

FIG. 2C is a horizontal top view schematic drawing of the cam lock of FIG. 2A. Groove 280 is adapted to receive an o-ring or other suitable sealing element. Groove 290, distal from groove 280, is adapted to receive the spring-stop described above, such that the spring-loaded stop acts to retain cam lock 200 within cam lock bore 130 when cam lock 200 is in an unlocked position.

FIG. 2D is an axial top view schematic drawing of the cam lock of FIG. 2A. Cam lock head 230 is formed to engage a wrench, such as a "T" wrench or Allen wrench, to rotate the cam. Head 230 may be formed to accommodate any desired wrench shape, including but not limited to, hex, square or triangular shapes. Triangular shapes are recommended because they are more resistant to stripping than

6

other shapes. Although depicted here as a socket head to receive a "T" or Allen wrench, alternative embodiments provide an extended or protruding head 230 adapted for a socket wrench such as ratchet wrench.

FIG. 2E is an axial bottom view schematic drawing of the cam lock of FIG. 2A. Recess 270 is adapted to receive a spring or a spring-loaded element in cam lock bore 130 such that the spring applies force to cam lock 200 to enhance the frictional engagement of cam lock 200 with cam pin 300.

FIG. 3A is a perspective view schematic drawing of cam pin 300 of one embodiment of the present invention. In the depicted embodiment, cam pin 300 has a cam pin body 310 at the distal end and a threaded end 350 at the proximate end. Cam pin body 310 provides concave portion 320 toward the distal end of cam pin body 310 and groove 330 at the proximate end of cam pin body 310. Threaded end 350 (threads not shown, see FIG. 3B) of cam pin 300 is disposed at the proximate end of cam pin 300. Threaded end 350 extends through cam pin bore 120 of adapter 100 and threadedly connects to a stripper rubber and cam pin body 310 is disposed within cam pin bore 120 of adapter 100.

FIG. 3B is a horizontal side view schematic drawing of the cam pin of FIG. 3A. Cam pin body 310 has concave portion 320 which has a curvature at most equal to the curvature of the bore 120 of adapter 100. Concave portion 320 includes oblique flat surface 340 that provides clearance to ensure that cam lock 200 properly engages concave portion 320. Threads are shown on threaded end 350, which threadedly attaches to a stripper rubber or a stripper rubber insert.

FIG. 3C is an axial bottom view schematic drawing of cam pin 300 of FIG. 3A. Groove 330 is adapted to engage a stop, such as a screw, on the stripper rubber assembly to inhibit excessive rotational movement of cam pin 300 but to allow an effective amount of movement of pin 300 to facilitate engagement of pin 300 with the cam lock 200. In addition, groove 330 serves as an orienting feature to facilitate effective positioning of cam pin 300 for engagement with cam lock 200.

FIG. 3D is an axial top view schematic drawing of the cam pin of FIG. 3A. From this perspective, pin body 310 obscures threaded end 350 due its larger outer diameter.

FIG. 4 is an exploded perspective view schematic drawing of one embodiment of an adapter 100 of the present invention. To connect a stripper rubber to a bearing assembly, spindle, inner barrel or other drilling head equipment, adapter 100 is fastened to the drilling head equipment by, for example, bolts extending through bores 150 to corresponding bores (not shown) on the equipment, and bolting adapter 100 to the equipment. One or more cam pins 300 extend through cam pin bores 120 so that threaded end 350 threadedly attaches to the stripper rubber. The stripper rubber may have one or more inserts or metal or some other durable material such that cam pins 300 connect with the insert of the stripper rubber. Cam pins 300 are oriented within cam pin bores 120 so that concave portion 320 of each pin 300 is parallel to the center line of primary bore 110. Groove 330 facilitates the proper orientation of pin 300 and, in one embodiment of the present invention, engages a stop structure, such as the head of a screw, to ensure proper rotational orientation of the cam pin within cam pin bore 120.

Threaded end 350 of each cam pin 300 is threadedly attached to a corresponding threaded bore in the metal insert of the stripper rubber. When cam pins 300 are connected to the stripper rubber, pins 300 are inaccessible within bores



120. The stripper rubber, however, is not attached to adapter 100 at this stage because pin bodies 310 simply slide out of bores 120.

One or more cam locks 200 are positioned in cam lock bores 130 of adapter 100 with the cam lock head 230 axially oriented so as to be exposed to the outer surface of adapter 100 and accessible to, for example, a wrench. Concave portion 220 of each cam lock 200 is axially oriented facing concave portion 320 of the corresponding cam pin 300 through aperture 140. Each cam lock 200 is rotated with the wrench until cam lock body 210 engages concave portion 320 of the corresponding cam pin 300, locking cam lock body 210 in concave portion 320 of the corresponding cam pin 300. The stripper rubber is effectively connected to the barrel, without clamps, bolts or threads, by locking together an effective number of cam locks 200 and cam pins 300.

One embodiment of the present invention provides a biased cam lock 200 that selectively pulls the stripper rubber assembly up tight against adapter 100, or which squeezes a sealing element between the stripper rubber and adapter 100, to form a fluid-tight seal between the stripper rubber and adapter 100. Biased cam locks 200 operate on cam pins 300 that are threadably connected to the stripper rubber. The biasing mechanism may be accomplished with biased locks or biased pins or by an arrangement of the respective bores such that the locking engagement of the locks and pins is achieved during rotation of cam lock 200 whereby cam lock 200 engages enough of pin body 310 to pull the stripper rubber into tight proximity with adapter 100 and then locks into position by friction or interference fit with concave portion 320 for a fluid-tight seal. By providing a biased embodiment, the present invention obtains an advantage over prior art connections, which do not provide biased embodiments for ensuring a fluid-tight seal. The present invention contemplates both biased and unbiased embodiments.

It is good practice to periodically replace or maintain stripper rubbers because stripper rubbers tend to wear out. To replace a stripper rubber, the stripper rubber must be disconnected from the drilling head equipment. To disconnect a stripper rubber pursuant to the present invention, it is a simple matter of rotating cam locks 200 to disengage the locks from the pins by aligning the corresponding concave portions of each element. Cam pins 300 attached to the stripper rubber will then slide relatively easily out of cam pin bores 120 of adapter 100 and the stripper rubber is disconnected from the equipment. A new stripper rubber with cam pins 300 is connected to the equipment as described above.

Numerous variations of the present invention will be apparent to those of ordinary skill in the art from the preceding exemplary description. For example, adapter 100 of the present invention may be connected to the drilling head by any suitable means other than bolting. Examples of such other means include, but are not limited to, welding and screwing. That is, a threaded adapter may be screwed onto a threaded barrel.

Similarly, cam pins 300 are not limited to threaded means for connecting to a stripper rubber or a stripper rubber insert. Various alternative embodiments of the present invention include stripper rubber inserts having integral cam pins, welded cam pins, snap rings or other attachments that are, or will be, known to those in the art.

It will also be apparent that the present invention is not limited to a particular number or shape of bores, cam locks, cam pins or bolts. Safety and reliability, however, would seem to recommend two or more lock/pin pairings.

Although the invention has been described with reference to several exemplary embodiments, it is understood that the words that have been used are words of description and illustration, rather than words of limitation. Changes may be made within the purview of the appended claims, as presently stated and as amended, without departing from the scope and spirit of the invention in all its aspects. Although the invention has been described with reference to particular means, materials and embodiments, the invention is not intended to be limited to the particulars disclosed; rather, the invention extends to all functionally equivalent technologies, structures, methods and uses such as are within the scope of the appended claims.

The invention claimed is:

1. A connector for selectively connecting a stripper rubber to drilling head equipment of a well, the connector comprising:
  - a generally cylindrical adapter connectable to the equipment, wherein the adapter defines a primary bore to accommodate a down hole tubular, the adapter further comprising:
    - (i) one or more cam pin bores substantially parallel to the primary bore;
    - (ii) one or more cam lock bores at least partially perpendicular to the one or more cam pin bores, wherein the cam lock bores are positioned such that the cam pin bores and cam lock bores partially intersect to form an aperture; and
    - (iii) an inner surface comprising a plurality of threaded bores substantially parallel to the primary bore.
2. The connector of claim 1, further comprising an O-ring groove along the outer diameter of the inner surface.
3. A connector system for connecting a stripper rubber to drilling head equipment of a well, the connector system comprising:
  - (a) a generally cylindrical adapter connectable to the equipment, wherein the adapter defines a primary bore to accommodate a down hole tubular, the adapter further comprising:
    - (i) one or more cam pin bores substantially parallel to the primary bore and adapted to house one or more cam pins;
    - (ii) one or more cam lock bores adapted to house one or more at least partially rotatable cam locks, wherein the cam lock bores are positioned such that the cam pin bores and cam lock bores partially intersect to form an aperture through which the cam locks engage the cam pins; and
    - (iii) an inner surface comprising a plurality of threaded bores substantially parallel to the primary;
  - (b) one or more at least partially rotatable cam locks disposable within one or more of the cam lock bores; and
  - (c) one or more cam pins disposable within one or more of the cam pin bores.
4. The connector system of claim 3, wherein the adapter further comprises an o-ring groove along the out diameter of the inner surface.
5. The connector system of claim 3, further comprising one or more springs disposable in one or more of the cam lock bores to provide a spring-biased force on one or more of the cam locks.
6. The connector system of claim 3, wherein one or more of the cam pins comprise a threaded end.

\* \* \* \* \*

17 2007